

(NUMBER)
C-174056


3rd ANGLE PROJECTION

METRIC




DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT LIST



REV. 10/83

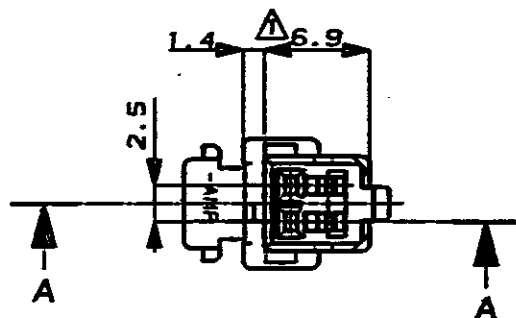

断面 A-A
SECT.

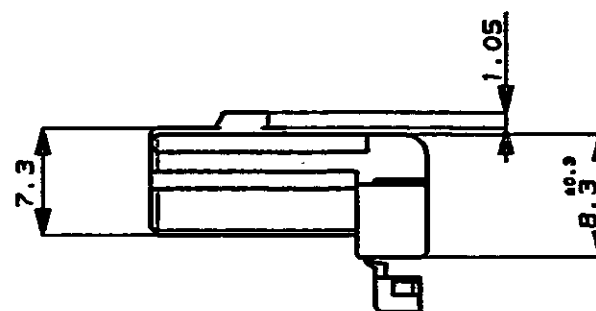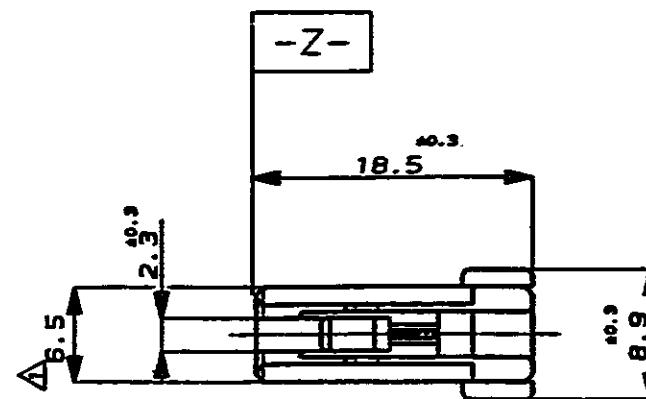

二重ロック時
DOUBLE LOCKED



注:

- △ -Z- 面から 2mmの範囲で測定。
2 適用端子型番: 173681

NOTE:

- △ TO BE MEASURED WITHIN 2mm FROM -Z-
2 APPLICABLE CONTACT PART NUMBER: 173681

青 (BLUE)	174056-5
緑 (GREEN)	174056-4
黒 (BLACK)	174056-2
色 (COLOR)	製品型番 (PART NO.)

Copyright ©1985年 AMP (Japan), LTD. ALL RIGHTS RESERVED.				Copyright ©1985 AMP (Japan), LTD. ALL RIGHTS RESERVED.				AMP AMP (JAPAN), LTD. Tokyo, Japan	
適用電線 (WIRE RANGE) —H— mm ² (AWG —)				被覆径 (INSULATION DIA.) —H— mm				名 称 (NAME) 2 POS. PLUG HOUSING, .040 SERIES MULTI-LOCK CONNECTOR 2極プラグハウジング, .040シリーズマルチロックコネクタ	
材料 (MATERIAL) PBT				色 (COLOR) 表参照 SEE TABLE				一般公差 (GENERAL TOLERANCES) 0<L<10 : ±0.2 10<L<30 : ±0.25 30<L<100 : ±0.3 角度 (ANGLES) : ±3°	
B. 再作成 REDRAWN J-12508				DR. 5/28/90				SIZE C	LOC J
LTR REVISION RECORD				CHK. 11. 2/24/90				REV. 2-1	REV. B
DR. 5/28/90				DE. 5/28/90				番号 (NUMBER) C-174056	
DATE				APP. 1/23/90				SHEET 1 OF 1	

CUSTOMER DRAWING 参考図面